




**HOHMANN & BARNARD, INC.**  
A MiTek - BERKSHIRE HATHAWAY COMPANY

# Glass Block Anchor & Reinforcement

## 220 Glass Block Reinforcement

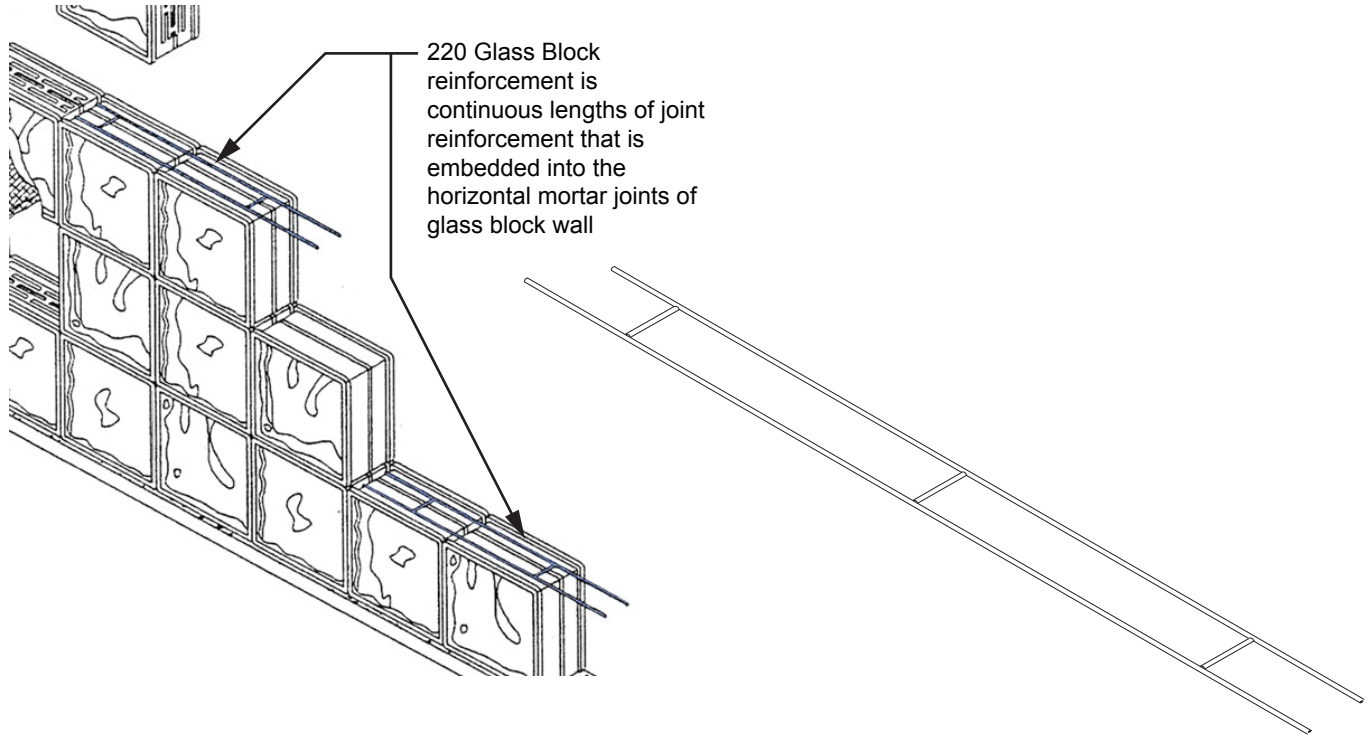

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

**MATERIAL CONFORMANCE:**

Hohmann & Barnard joint reinforcement products conform to:  
**ASTM A951/A951M** (Std. Specification for Steel Wire for Masonry Joint Reinforcement)  
**ACI / ASCE 530** (Building Code Requirements for Masonry Structures)

**Wire** (Carbon Steel):  
 Prefabricated from cold-drawn steel wire conforming to **ASTM A82/A82M**  
 Tensile Strength - 80,000 p.s.i. | Yield Point - 70,000 p.s.i. minimum  
 Zinc Coating:  
 Mill Galvanized coating: **ASTM A641/A641M** (0.1 oz/ft<sup>2</sup>)  
 Hot-Dip Galvanized after fabrication: **ASTM A153/A153M-B2** (1.5 oz/ft<sup>2</sup>)  
 Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ft<sup>2</sup>

**Wire** (Stainless Steel): **ASTM A580/ASTM 580M** - AISI Type 304  
 (Type 316 available on special order)

**Wire Diameter:**  
 9 gauge (.148" or W1.7)  
 Side Rods and Cross Rods available in any combination of the above.  
 Cross welded 16" O.C.  
 First Cross Rods welded 12" in from each end to allow lap splices per code requirements.

**H&B manufactures steel wire products from a minimum of 95% post-consumer recycled material.**

**Finishes:**

- Mill Galvanized Coating
- Hot-Dip Galvanized
- Stainless Steel - Type 304 (Type 316 available on special order)

**Note: H&B recommends Stainless Steel for maximum protection against corrosion.**

**Dimensions:**

**Diameter:** (standard) 9 ga. side rods x 9 ga. cross rods

**Widths:**  1-5/8"  2"

**Lengths:**  4'  10'  Custom \_\_\_\_\_

**HOHMANN & BARNARD, Inc.**  
 30 Rasons Court | Hauppauge, NY 11788  
 CORPORATE HEADQUARTERS  
 T: 800.645.0616 F: 631.234.0683  
**www.h-b.com**

**Branch/Subsidiary Locations:**  
 ALABAMA - ILLINOIS - MARYLAND  
 NEW YORK - PENNSYLVANIA - TEXAS  
 CANADA

© HOHMANN & BARNARD, INC. - 2012