




HOHMANN & BARNARD, INC.
A MiTek - BERKSHIRE HATHAWAY COMPANY

Flashing and Reglets

Flex-Flash® Drip Edge

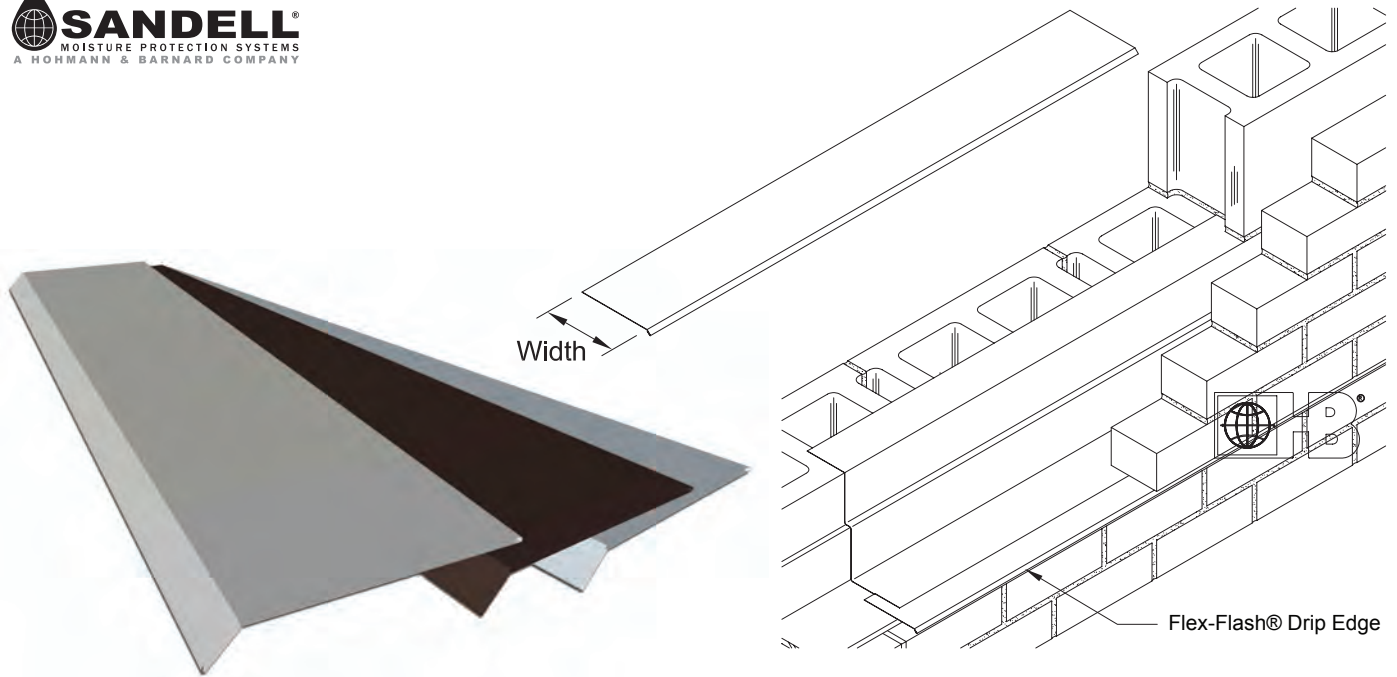

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

Flex-Flash® Drip Edge is a durable, 45-mil thick factory-formed extruded drip edge formulated with Elvaloy® Kee*.

- Extremely tough, with excellent impact and tear resistance
- Flexibility is maintained in all weather environments, even in extreme heat or cold
- Highly resistant to oils and repels most chemicals
- Compatible with most silicone and urethane sealants
- Not susceptible to UV degradation

U.S. Pat. No. D648,865

PERFORMANCE DATA

Tear Strength - ASTM D-751, A	
Machine Direction	100.44 (lbf)
Cross Machine Direction	87.10 (lbf)
Tear Strength at Break - ASTM D-751, A	
Machine Direction	337.25 (lbf)
Cross Machine Direction	323.10 (lbf)
Elongation at Break - ASTM D-751, A	
Machine Direction	34.49%
Cross Machine Direction	26.51%
Seam Strength - ASTM D-751	370.88 (lbf)
Puncture Resistance - ASTM D-751	73.22 (lbf)
Heat Aging of Membrane	
Break Strength at Break	N/A
Elongation at Break	N/A
Dimensional Stability - ASTM D-1204	
(for 6 hrs. @ 176)	N/A
Water Absorption - ASTM D-570	
(for 48 hrs. @ 70)	N/A

*Elvaloy is a registered trademark of the DuPont Company.

Dimensions:

- Thickness 45 mil
- 3" wide x 8' long with a 3/8" drip

Colors:

- Ivory Brown Gray

NOTE: Compatible for use with any H&B flashing products.

SEALANT COMPATIBILITY

<i>Urethanes</i>	Product	Primer Required
Company		
SIKA	Sikaflex-1A	#260-205
Sonneborn	Sonolastic NP1	#733
Tremco	Dymonic	#6 or #17

<i>Silicones</i>	Product	Primer Required
Company		
Dow Corning	790 & 791	1200
Prime Coat	795 (Dark colors only)	1205 Prime Coat
GE Silicones	Silpruf®	SS4179
Pecora	890 & 895	P-120
Tremco	Spectrem 2	#10

HOHMANN & BARNARD, Inc.
30 Rasons Court | Hauppauge, NY 11788
CORPORATE HEADQUARTERS
T: 800.645.0616 F: 631.234.0683
www.h-b.com

Branch/Subsidiary Locations:
ALABAMA - ILLINOIS - MARYLAND
NEW YORK - PENNSYLVANIA - TEXAS
CANADA

© HOHMANN & BARNARD, INC. - 2012